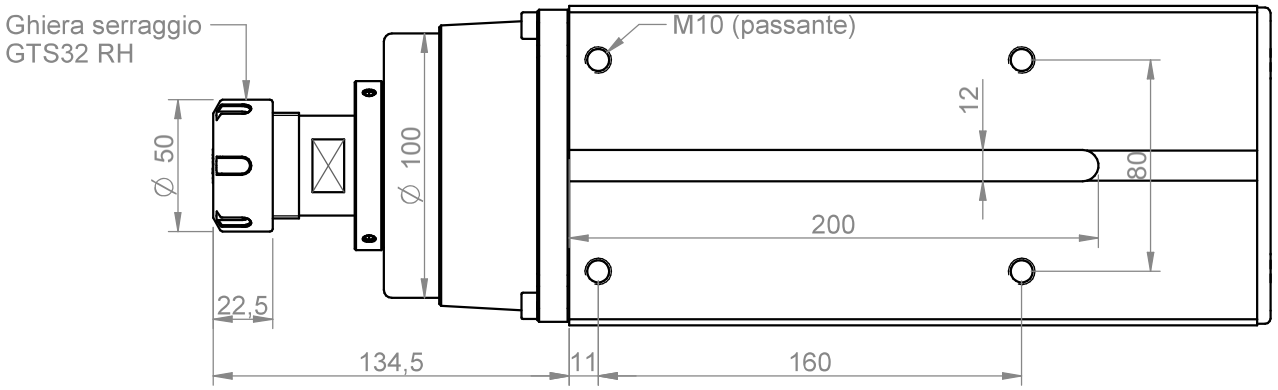

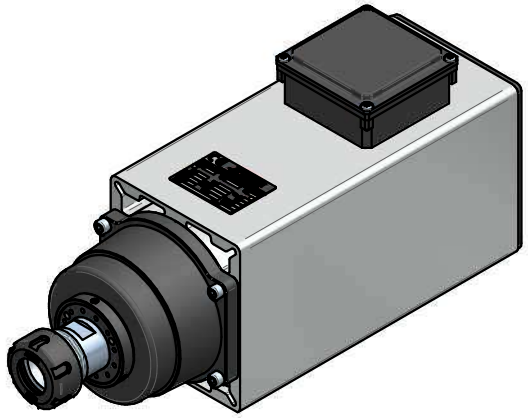

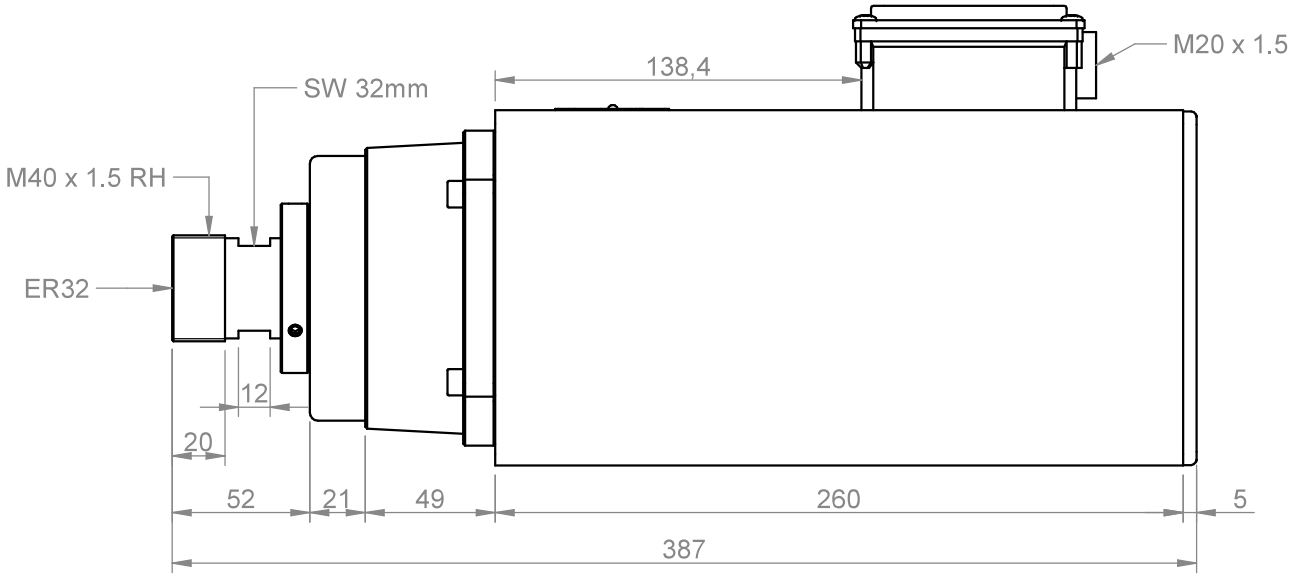

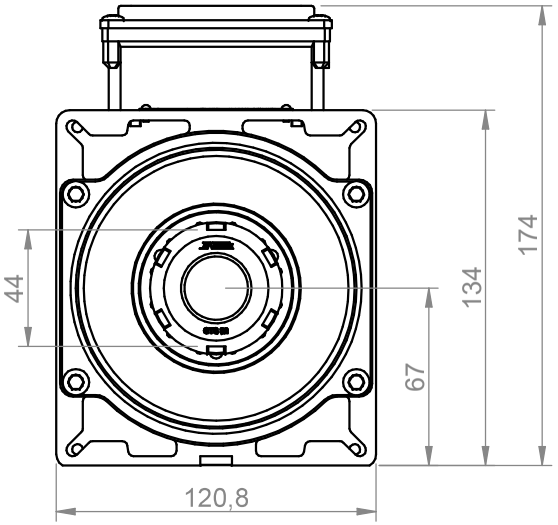

Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Base voltage Y [V]	Protection	Ins. Cl.
7.0	S1	18000	300	220	380	IP54	F

Min speed [rpm]	Max speed [rpm]	Max freq. [Hz]	Absorb. Δ [A]	Absorb. Y [A]	Part number on nameplate
6000	18000	300	25.0	14.5	COM60670012

Balancing: G2.5 - ISO 1940 @ maximum motor speed	Balancing type	tool type	full key	tool type	half key	Peso / weight
						20.92 kg

Tolleranze non quotate / unlisted tollerances: ±0.5mm
Smussi non quotati / unlisted chamfers: ±0.5mm

▽▽▽ = 0.8 ▽▽ = 3.2 ▽ = 12.5 ~ = ▽

rev. n°	description	date	signature
00	Emissione	20/11/2015	D. Bottarel

drawn - date	approved - date	checked - date	sostituisce il	foglio / sheet	scala
D. Bottarel - 20/11/2015	S. Perli - 20/11/2015	S. Perli - 20/11/2015	sostituito dal	1 / 1	n.d.

TEKNOMOTOR

Teknomotor S.r.l.
Via Argenega 31, I-32038 Quero Vas (BL)
www.teknomotor.com

Title: 6067-D-DB-P-ER32-RH

Customer: Catalogo

Drawing code: COM60670012

Drawing n°: 1935

A4

Il presente disegno è di proprietà esclusiva di Teknomotor S.r.l. La riproduzione totale e/o parziale e la divulgazione a terzi, senza nostro esplicito consenso scritto, verrà perseguito secondo i termini di legge in vigore.