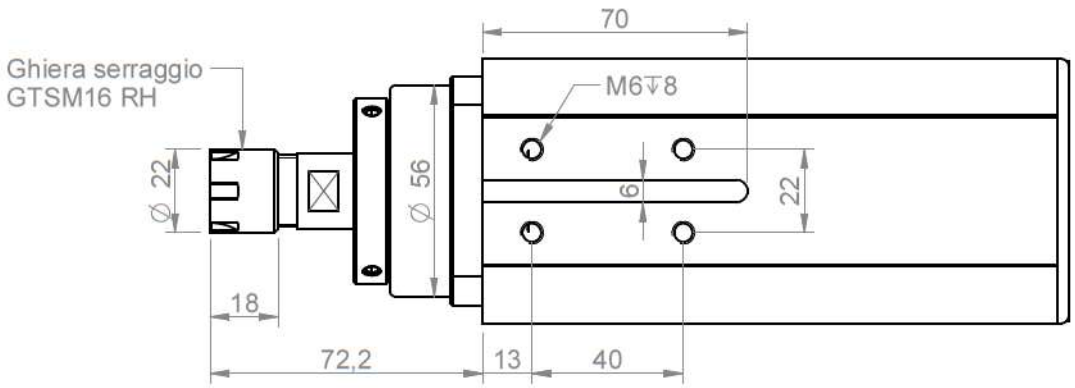

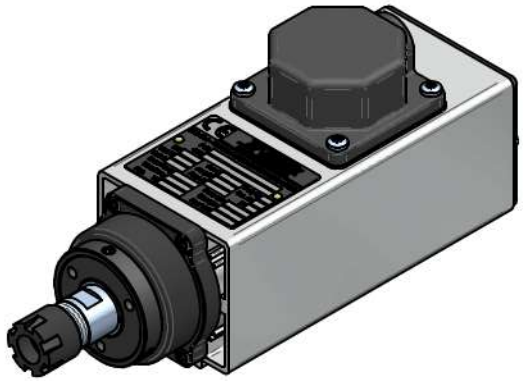

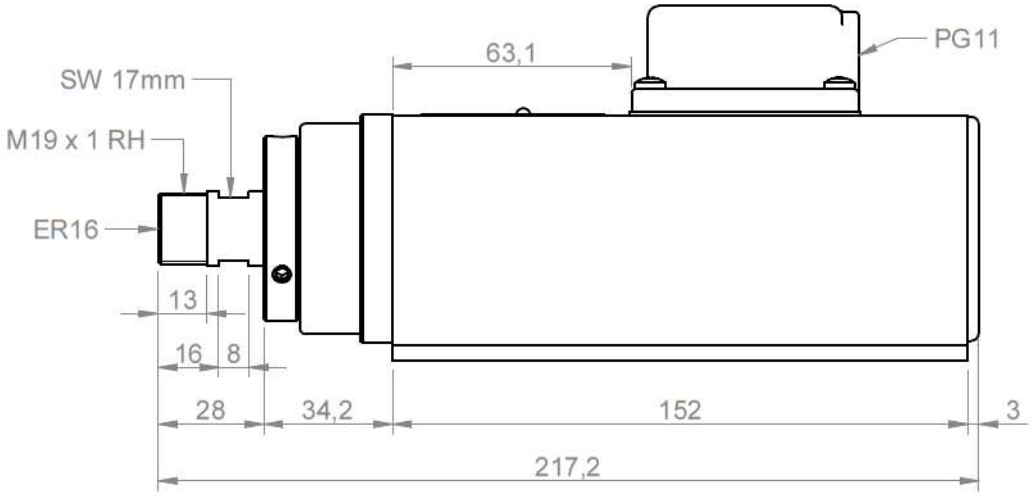

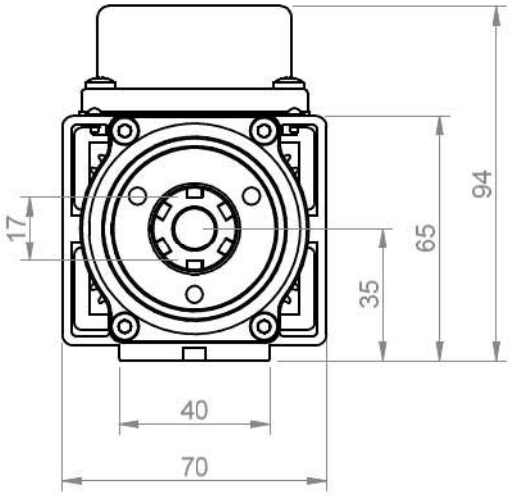

Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Base voltage Y [V]	Protection	Ins. Cl.
0.33	S1	18000	300	220	380	IP54	F

Min speed [rpm]	Max speed [rpm]	Max freq. [Hz]	Absorb. Δ [A]	Absorb. Y [A]	Part number on nameplate
9000	24000	400	2.1	1.2	COMNC350222

Balancing: G2.5 - ISO 1940 @ maximum motor speed	Balancing type	tool type / full key	tool type / half key	Peso / weight
				2.76 kg

Tolleranze non quotate / unlisted tollerances: ±0.5mm
Smussi non quotati / unlisted chamfers: ±0.5mm

▽▽ = 0.8 ▽ | ▽▽ = 3.2 ▽ | ▽ = 12.5 ▽ | ~ = ▽

rev. n°	description	date	signature
00	Emissione	30/10/2015	D. Bottarel

drawn - date	approved - date	checked - date	sostituisce il
D. Bottarel - 30/10/2015	S. Perli - 30/10/2015	S. Perli - 30/10/2015	sostituito dal

Teknomotor S.r.l.
Via Argenega 31, I-32038 Quero Vas (BL)
www.teknomotor.com

Title: NC35-A-DB-P-ER16-RH

Customer: Catalogo

Drawing code: COMNC350222

Drawing n°: 2347

foglio / sheet: 1 / 1

scala: 1:2

A4

Il presente disegno è di proprietà esclusiva di Teknomotor S.r.l. La riproduzione totale e/o parziale e la divulgazione a terzi, senza nostro esplicito consenso scritto, verrà perseguito secondo i termini di legge in vigore.